




Bearing Rolamentos do Brasil Ltda.

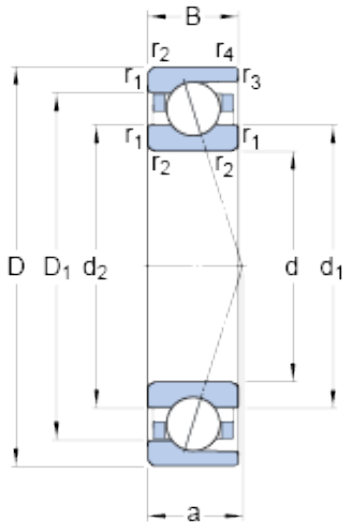

71906 ACD/HCP4A Bearing 2D drawings and 3D CAD models

30 mm x 47 mm x 9 mm SKF 71906
ACD/HCP4A angular contact ball bearings

Bearing No. 71906 ACD/HCP4A

Size	47x30x9 mm
Bore Diameter	47 mm
Outer Diameter	30 mm
Width	9 mm
d	30 mm
D	47 mm
B	9 mm
d ₁	35.6 mm
d ₂	35.6 mm
D ₁	41.4 mm
r _{1,2} - min.	0.3 mm
r _{3,4} - min.	0.2 mm
a	13.6 mm
d _a - min.	32 mm
d _b - min.	32 mm
D _a - max.	45 mm
D _b - max.	45.6 mm
r _a - max.	0.3 mm
r _b - max.	0.2 mm
d _n	36.8 mm
Basic dynamic load rating - C	6.8 kN
Basic static load rating - C ₀	4.3 kN
Fatigue load limit - P _u	0.183 kN
Limiting speed for grease	32000 r/min



Bearing Rolamentos do Brasil Ltda.

Lubrication	
Limiting speed for oil lubrication	48000 mm/min
Ball - D_w	4.762 mm
Ball - z	20
G_{ref}	0.63 cm ³
Calculation factor - e	0.68
Calculation factor - Y_2	0.87
Calculation factor - Y_0	0.38
Calculation factor - X_2	0.41
Calculation factor - Y_1	0.92
Calculation factor - Y_2	1.41
Calculation factor - Y_0	0.76
Calculation factor - X_2	0.67
Preload class A - G_A	40 N
Preload class B - G_B	80 N
Preload class C - G_C	160 N
Preload class D - G_D	320 N
Calculation factor - f	1.08
Calculation factor - f_1	0.98
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.07
Calculation factor - f_{2C}	1.12
Calculation factor - f_{2D}	1.17
Calculation factor - f_{HC}	1.04
Preload class A	72 N/micron
Preload class B	93 N/micron
Preload class C	121 N/micron
Preload class D	161 N/micron



Bearing Rolamentos do Brasil Ltda.

d_1	35.6 mm
d_2	35.6 mm
D_1	41.4 mm
$r_{1,2}$ min.	0.3 mm
$r_{3,4}$ min.	0.2 mm
d_a min.	32 mm
d_b min.	32 mm
D_a max.	45 mm
D_b max.	45.6 mm
r_a max.	0.3 mm
r_b max.	0.2 mm
d_n	36.8 mm
Basic dynamic load rating C	6.76 kN
Basic static load rating C_0	4.3 kN
Fatigue load limit P_u	0.183 kN
Attainable speed for grease lubrication	32000 r/min
Attainable speed for oil-air lubrication	48000 r/min
Ball diameter D_w	4.762 mm
Number of balls z	20
Reference grease quantity G_{ref}	0.63 cm ³
Preload class A G_A	40 N
Static axial stiffness, preload class A	72 N/ μ m
Preload class B G_B	80 N
Static axial stiffness, preload class B	93 N/ μ m
Preload class C G_C	160 N
Static axial stiffness, preload class C	121 N/ μ m
Preload class D G_D	320 N
Static axial stiffness, preload class D	161 N/ μ m



Bearing Rolamentos do Brasil Ltda.

class D	
Calculation factor f	1.08
Calculation factor f_1	0.98
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.07
Calculation factor f_{2C}	1.12
Calculation factor f_{2D}	1.17
Calculation factor f_{HC}	1.04
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67
Mass bearing	0.045 kg